

Specifications

Materials:

Body:	Nylon
Contact Carrier:	Nylon
Contact:	Copper Alloy, Gold Plated
Coupling Nut:	Brass with Nickel Plating
Cable Outlets:	PG7 - 4 to 6mm, PG9 - 6 to 8mm


Electrical:

Voltage Rating:	4 Pole 125VAC/150VDC 5 Pole 30VAC/36VDC
Current Rating:	3 amps
Max. Wire Gauge:	18 Gauge

Environmental:

Protection:	IP67
Operating Temp:	-40°C to 85°C

Dimensions

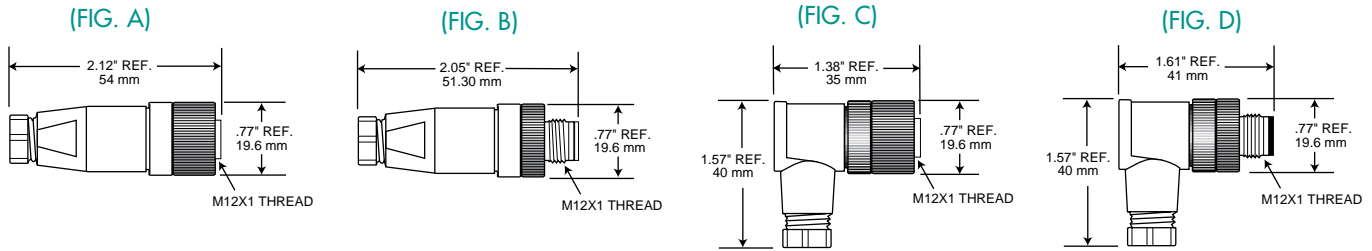

Note: PG7 Cable Range .16" (4mm) to .24" (6mm)

Note: PG9 Cable Range .24" (6mm) to .31" (8mm)

NUMBER OF POLES	4		5	
Female - Contact Rotation				
Cable Entry	PG7	PG9	PG7	PG9
Female - Straight Type (Fig. A)	304AFW7	304AFW9	305AFW7	305AFW9
Female - Right Angle Type (Fig. C)	304CFW7	304CFW9	305CFW7	305CFW9
Male - Contact Rotation				
Cable Entry	PG7	PG9	PG7	PG9
Male - Straight Type (Fig. B)	304EFW7	304EFW9	305EFW7	305EFW9
Male - Right Angle Type (Fig. D)	304FFW7	304FFW9	305FFW7	305FFW9