

Trunk (Thick) Mini-Type

Specifications:

Materials:

Body:	PVC
Contact Carrier:	Nitrile Rubber
Contact Sleeve:	Stainless Steel
Contact:	Brass, Gold Plated over Nickel
Coupling Nut:	Machined Aluminum, Black Anodized
Cable:	DeviceNet PVC Jacketed/Shielded 80°C See Bulk Cable Page 114
Cable Diameter:	5/C - .48

Electrical:


Voltage:	300V
Current:	See Bulk Cable Page 114

Environmental:

Protection:	IP68, NEMA GP
Operating Temp:	-20 to 80°C

Certifications: Pending

Dimensions

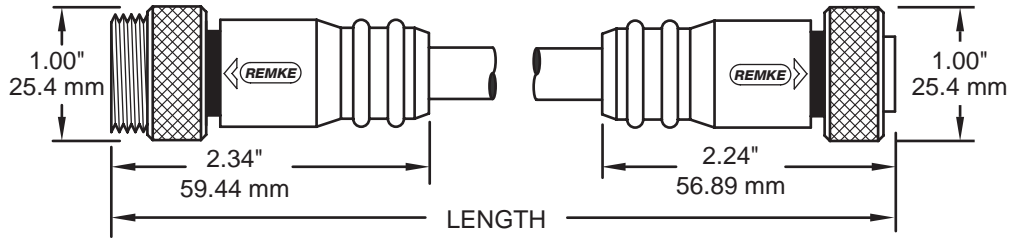

	MALE FACE	FEMALE FACE
Face Views		
Wiring Color Code	1=Drain 2=Red(V+) 3=Black(V-) 4=White(CAN_H) 5=Blue(CAN_L)	1=Drain 2=Red(V+) 3=Black(V-) 4=White(CAN_H) 5=Blue(CAN_L)
Double-Ended Assemblies		
Male/Female	2M/6.6 Ft. 4M/13.1 Ft. 5M/16.4 Ft.	A05K0066DT A05K0131DT A05K0164DT

Note: See ordering nomenclature for different lengths/options.