

## Drop (Thin) Micro-Type

### Specification:

#### Materials:

Body: PVC  
 Contact Carrier: Zytel ST801  
 Contact: Brass, Gold Plated over Nickel  
 Coupling Nut: Machined Aluminum, Black Anodized  
 Cable: Device Net PVC Jacketed/Shielded 80° C  
 See Bulk Cable Page 115  
 Cable Diameter: 5/C-.28"

#### Electrical:


Voltage: 300 V  
 Current: See Bulk Cable Page 115

#### Environmental:

Protection: IP68, NEMA 6P  
 Operating Temp: - 20° to 80° C

**Certifications:** Pending

### Dimensions

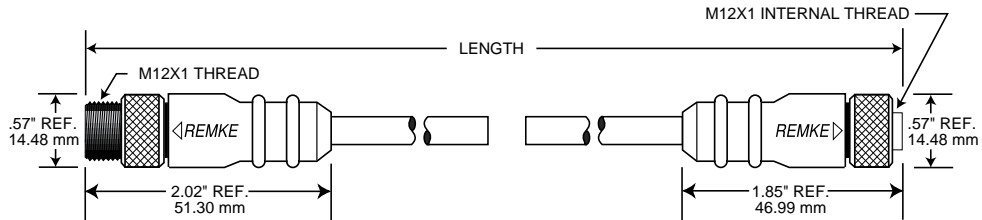

	MALE FACE	FEMALE FACE
Face Views		
Wiring Color Code	1=Drain 2=Red(V+) 3=Black(V-) 4=White(CAN_H) 5=Blue(CAN_L)	1=Drain 2=Red(V+) 3=Black(V-) 4=White(CAN_H) 5=Blue(CAN_L)
<b>Double-Ended Assemblies</b>		
<b>Male/Female</b>	2M/6.6 Ft. 4M/13.1 Ft. 5M/16.4 Ft.	B05K0066DD B05K0131DD B05K0164DD

Note: See ordering nomenclature for different lengths/options.