

4 & 6 Outlet Passive In-Out Type

Specifications:

Materials:

Contact Carrier (Trunk In-Out):	Nitrile Rubber
(Micro Outs)	Zytel ST801
Contacts:	Brass, Gold Plated over Nickel
Sleeve:	Stainless Steel
Port Shell:	Anodized Aluminum
Housing:	Polyester
Label Material:	Polyester

Electrical:

Voltage:	300V
Current:	5 amps per Unit


Environmental:

Protection:	IP68, NEMA 6P
Operating Temp:	-40°C to 90°C

Certifications:

Pending

Dimensions

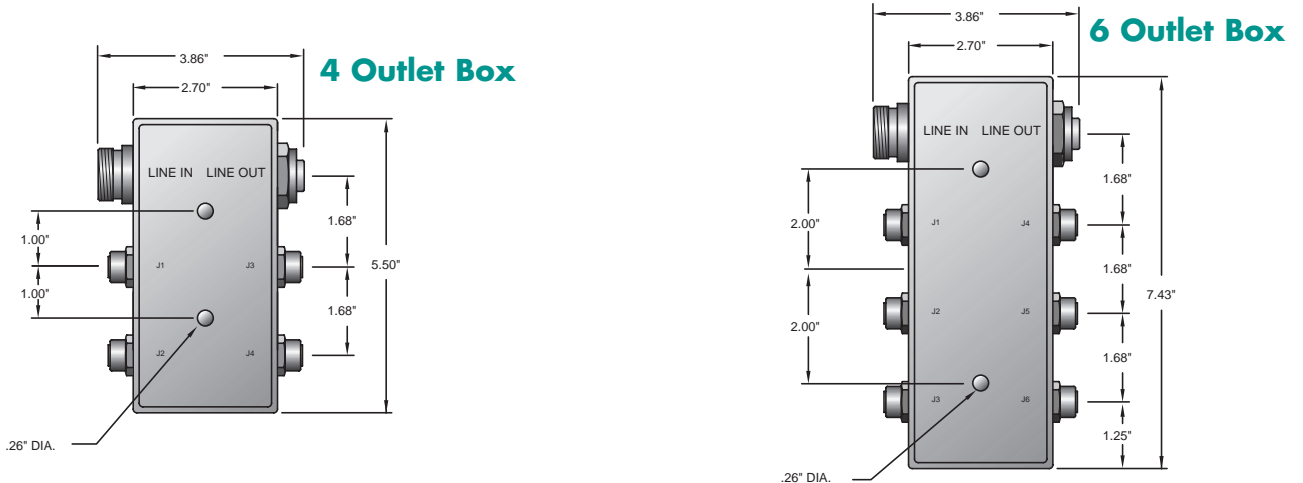


NOTE: Box height for all sizes - 1.37"/34.80mm.

	MALE BUS (In)	FEMALE BUS (Out)
Pinouts		
Wiring Code/Function	1 = Drain 2 = (V+) 3 = (V-) 4 = (CAN_H) 5 = (CAN_L)	1 = Drain 2 = (V+) 3 = (V-) 4 = (CAN_H) 5 = (CAN_L)
4 Outlet Part Number	3400065	
6 Outlet Part Number	3400064	

4 & 6 Outlet Passive In-Out Type

4 Outlet Wiring Diagram

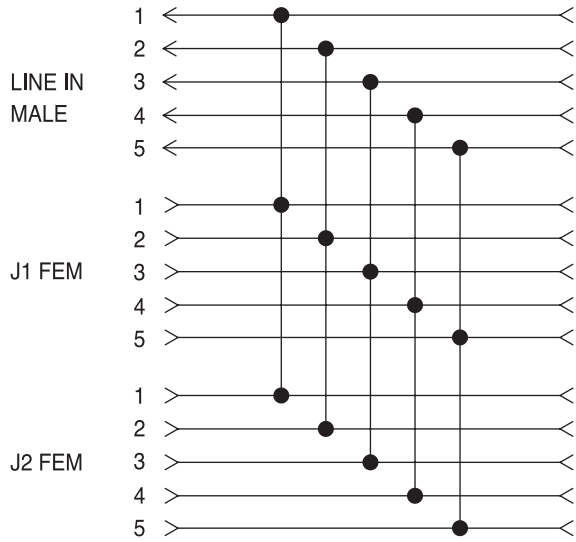

6 Outlet Wiring Diagram

