

## Specifications:

### Materials:

Body: PVC  
 O-Ring: Nitrile Rubber (Micro-type)  
 Contact Carrier: Mini-Nitrile Rubber, Micro-Nylon  
 Contact: Brass, Gold Plated over Nickel  
 Coupling Nut: Machined Aluminum, Black Anodized

### Electrical:

Voltage: 50V  
 Ampacity: Mini - 8A  
 Micro - 4A  
 Load Resistance: 120 Ohm


### Environmental:

Protection: IP68, NEMA 6P  
 Operating Temp: -20 to 80° C


**Certifications:** Pending

## Dimensions


### Mini Female Terminator

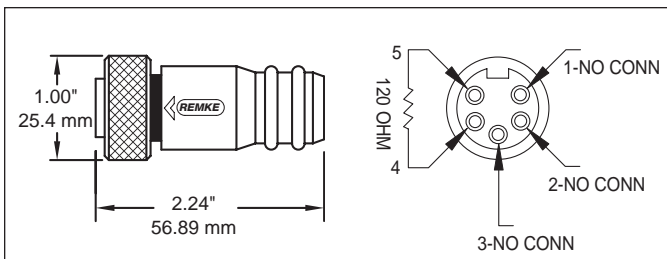


### Mini Male Terminator

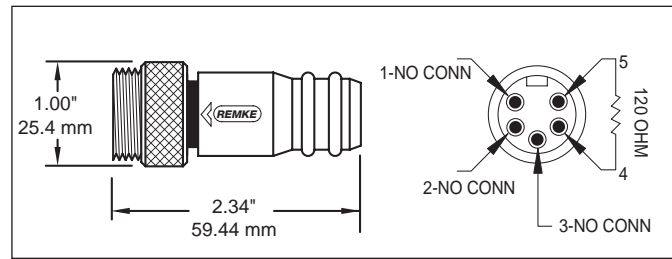

### Micro Female Terminator

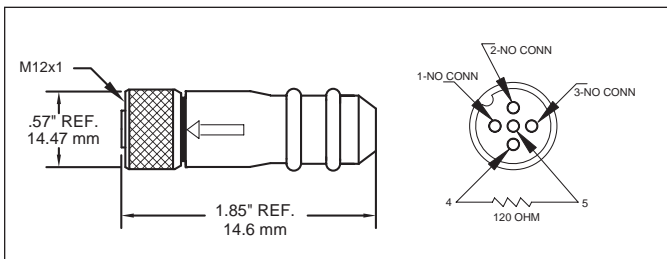

### Micro Male Terminator

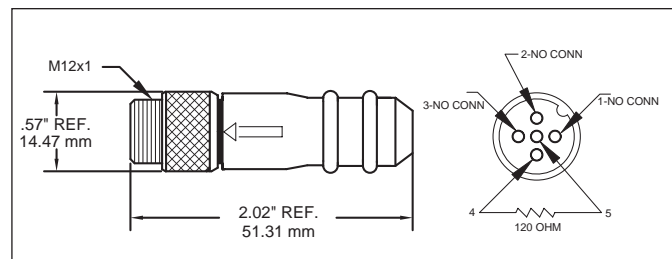

Terminator Type	Part Number
Mini-Type Male	A05ET
Mini-Type Female	A05AT
Micro-Type Male	B05ET
Micro-Type Female	B05AT

### Options:

- Stainless Steel Couplers
- Non-metallic Couplers