
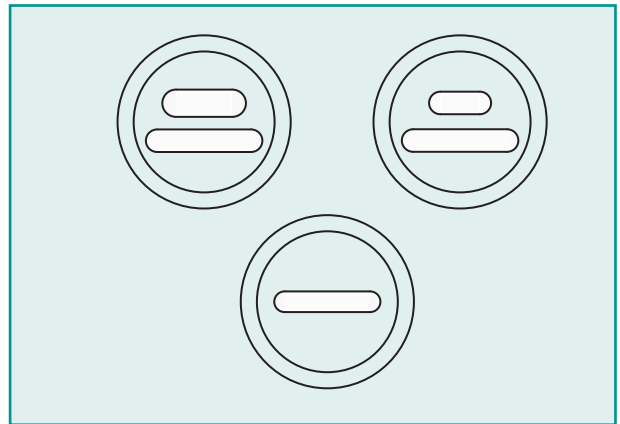


RSF Series Aluminum Flat Cable Cord Grips

Tuff-Seal RSF Series Aluminum Cord Grips are specially designed and molded for heavy-duty, flat cable or festoon system applications. Unique to the US market, these cord grips are used in place of the traditional two-screw connector at the critical point of termination between the plant environment and the internal wiring of the festoon system. With this Flat Cable Cord Grip users can place multiple cables through one connector saving both labor time cost by eliminating the need for multiple termination and multiple connectors.

Manufactured for use in both indoor and outdoor locations, these Tuff-Seal Flat Cable grips seal out dirt, moisture, coolants, lubricant and corrosives. They are available in machined aluminum, steel, stainless steel and nylon with either M style (ISO), Pg or NPT threads. RSF Series Grips can be customized based on the number and size conductors utilized in a specific application.

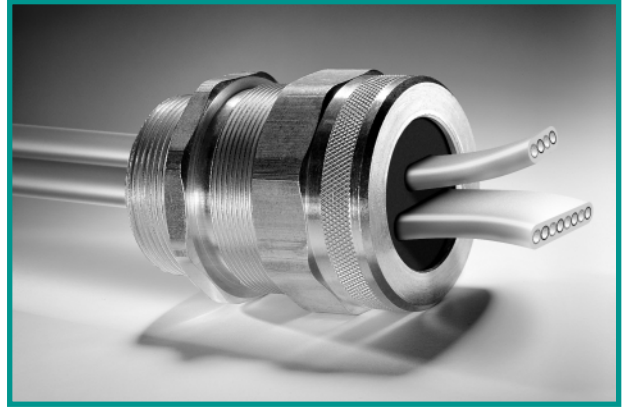

RSF Series Aluminum Cord Grips



| Conduit Size | Complete Assembly | Body, Nut, Washer Assembly | Bushing Only | Bushing Dimensions (hole size) | Number of Holes | | |
|--------------|-------------------|----------------------------|--------------|--------------------------------|-----------------|------------|---------|
| 1" | RSF-3001 | RSR-300-W | SBF-3001 | .66 x .24 | | | |
| | RSF-3002 | | SBF-3002 | .75 x .25 | | | |
| | RSF-3003 | | SBF-3003 | .89 x .29 | | | |
| 1 1/4" | RSF-4001 | RSR-400-W | SBF-5001 | 1.19 x .35 | | | |
| | RSF-4002 | | SBF-5002 | 1.37 x .25 | | | |
| | RSF-4003 | | SBF-5003 | 1.24 x .24 | | | |
| | RSF-4004 | | SBF-5004 | 1.13 x .22 | | | |
| | RSF-4005 | | SBF-5005 | 1.24 x .24 | | 2 holes | |
| | RSF-4006 | | SBF-5006 | 1.13 x .22 | | 2 holes | |
| | RSF-4007 | | SBF-5007 | .66 x .24 | | 1.13 x .22 | 2 holes |
| | RSF-4008 | | SBF-5008 | .66 x .24 | | 1.24 x .24 | 2 holes |
| | RSF-4009 | | SBF-5009 | .89 x .29 | | 1.13 x .22 | 2 holes |
| | RSF-4010 | | SBF-5010 | .89 x .29 | | 1.24 x .24 | 2 holes |
| | RSF-4011 | | SBF-5011 | .75 x .25 | | 1.13 x .22 | 2 holes |
| | RSF-4012 | | SBF-5012 | .75 x .25 | | 1.24 x .24 | 2 holes |
| 1 1/2" | RSF-5001 | RSR-500-W | SBF-5001 | 1.19 x .35 | | | |
| | RSF-5002 | | SBF-5002 | 1.37 x .25 | | | |
| | RSF-5003 | | SBF-5003 | 1.24 x .24 | | | |
| | RSF-5004 | | SBF-5004 | 1.13 x .22 | | | |
| | RSF-5005 | | SBF-5005 | 1.24 x .24 | | 2 holes | |
| | RSF-5006 | | SBF-5006 | 1.13 x .22 | | 2 holes | |
| | RSF-5007 | | SBF-5007 | .66 x .24 | | 1.13 x .22 | 2 holes |
| | RSF-5008 | | SBF-5008 | .66 x .24 | | 1.24 x .24 | 2 holes |
| | RSF-5009 | | SBF-5009 | .89 x .29 | | 1.13 x .22 | 2 holes |
| | RSF-5010 | | SBF-5010 | .89 x .29 | | 1.24 x .24 | 2 holes |
| | RSF-5011 | | SBF-5011 | .75 x .25 | | 1.13 x .22 | 2 holes |
| | RSF-5012 | | SBF-5012 | .75 x .25 | | 1.24 x .24 | 2 holes |
| 2" | RSF-6001 | RSR-600-W | SBF-6001 | 1.71 x .50 | | | |
| | RSF-6002 | | SBF-6002 | 1.46 x .45 | | | |
| | RSF-6003 | | SBF-6003 | 1.77 x .24 | | | |
| | RSF-6004 | | SBF-6004 | 1.65 x .22 | | | |
| | RSF-6005 | | SBF-6005 | 1.77 x .24 | | 2 holes | |
| | RSF-6006 | | SBF-6006 | 1.65 x .22 | | 2 holes | |
| | RSF-6007 | | SBF-6007 | 1.37 x .25 | | 2 holes | |

Connectors are available in machined aluminum, steel, stainless steel, and nylon fittings.

Threads can be supplied as M style (ISO), Pg or NPT.

Remke will manufacture connectors and bushings to customer-specific dimensions and applications.

Custom configurations and sizes are available. Consult factory.