


Cable Range	Catalog Numbers	Description	Approx.* Breaking Strength	Length Eye	Mesh
Single Eye—Wide Range					
.22-.32	7304-001	BD022	350	3	3½
.30-.43	7304-002	BD030	450	4	4
.41-.56	7304-003	BD041	550	6	4¾
.53-.73	7304-004	BD053	1000	7	6
.70-.85	7304-005	BD070	1400	7	6¾
.82-1.00	7304-006	BD082	1400	8	8
.96-1.25	7304-007	BD096	1500	9	9½
Universal Bail—Wide Range					
.22-.32	7304-009	BD022-UB	350	9	3½
.30-.43	7304-010	BD030-UB	450	10	4
.41-.56	7304-011	BD041-UB	550	12	4¾
.53-.73	7304-012	BD053-UB	1000	13	6
.70-.85	7304-013	BD070-UB	1400	13	6¾
.82-1.00	7304-014	BD082-UB	1400	14	8
.96-1.25	7304-015	BD096-UB	1500	15	9½



Bus Drop Grips

Tuff-Seal Bus Drop Grips support flexible cord or cable when power is supplied from an overhead source. They relieve tension and absorb vibration thus protecting the cable. These grips are woven of galvanized steel wire and are offered with either a single eye or universal bail.

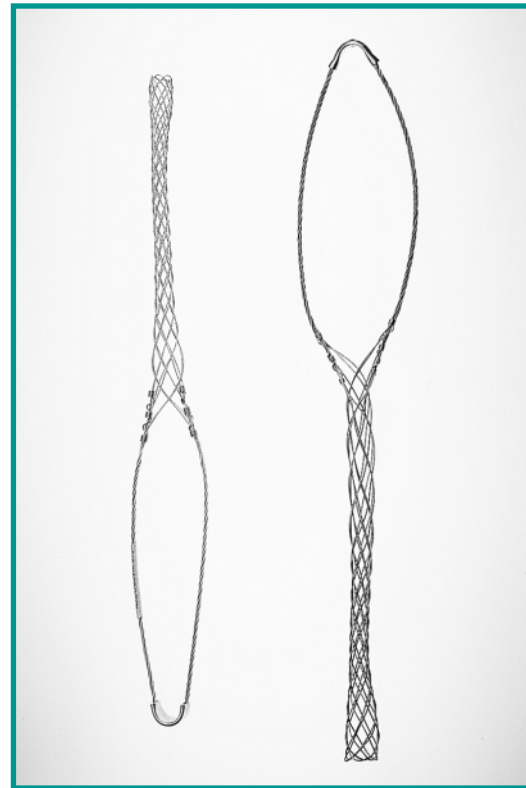

Bus Drop Safety Springs

Tuff-Seal Bus Drop Safety Springs are used with the Bus Drop Grips to relieve sudden strain on cord or cable overhead systems. These safety springs can be used with single-eye type grips by disassembling the drawbar from the coil, place it through the eye and replace the drawbar.

Description	Catalog Numbers	Maximum Deflection	Breaking Strength	Approx.* Length (No Load)	Diameter
40 lb. Spring	203-02-001	2 ⁵ / ₈ " at 40 lbs.	500	8 ¹ / ₄ "	³ / ₄ "
80 lb. Spring	203-02-002	3 ¹ / ₈ " at 80 lbs.	850	8 ¹ / ₄ "	1"